

SCB 215 Battery

ECB-021500-T00


Commercial Energy Storage - TW

The series products provide a large-capacity of power for commercial or industrial needs.

One is to provide backup power to avoid losses caused by power outages.

Another is to enlarge maximum power capacities in a short time to cover peak loading without over contract capacity.

The most popular one is to balance power demand by storing during light power and low-price period and releasing power during heavy power and high-price period to keep in contract capacity range or save electricity bills.

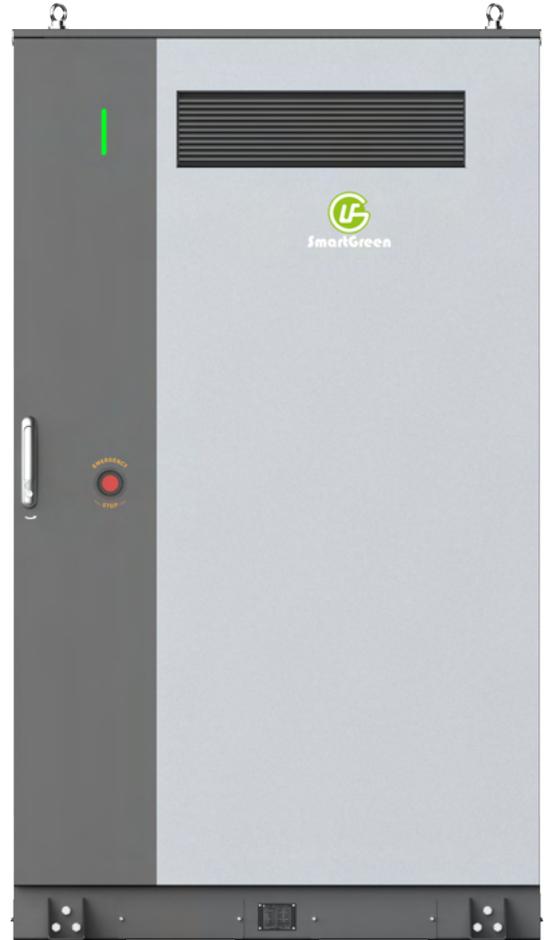

Product

HIGHLIGHT



Highly integrated and modular design with LFP, BMS, EMS, PCS, HVAC in a cabinet and easy to install and maintain.



High-performance modular battery with high cycle life and transfer efficiency up to more than 90%.



High safety for outdoor use with IP54 water-proof and built-in smoke detector and auto fire extinguisher system.

Commercial Energy Storage - Battery

Series	SCB 215
Model Name	ECB-021500-T00
Performance	
Cell capacity / Material	280 Ah / LFP Prismatic
Working voltage	Rated: 768 Vdc, range: 720Vdc to 852Vdc
Installed capacity / DoD	215 kWh / 93 %
Charge - discharge rate	≤ 0.5 P
Interior PCS - Battery port	
Working voltage	650Vdc - 950 Vdc
Working current	Max 158 A
Interior PCS - Grid port	
Wire connection	L1+L2+L3+N+PE, three-phase
Rated voltage	220/380 Vac, 60Hz
Working power	Max. 100 kVA (on-grid) / Max. 100 kVA (off-grid)
Working current	Rated 151 A (on-grid) / Max. 151 A (off-grid) with linear load
Interface / Communication	
Display	7-inch touch screen (interior)
Interface	Ethernet
General Parameter	
Operating temperature	-20 °C to +55 °C
Humidity	≤ 85% RH, no condensation
Operating altitude	≤2000 m
Mechanical	
Enclosure protection	IP55
Cooling	Industrial air-controlled system
Dimensions (W x H x D)	1,257 x 2,200 x 1,438 mm (AC cooling included)
Weight	2,545 kg ± 20 kg
Installation type	Ground - mounting
Protection	
Protection function	OCP, OPP, SCP, OVP, UVP, OTP, over/under frequency, anti-reverse wiring protection
Detection function	Buzzing alarm, Access control monitoring(travel switch), Combustible gas (smoke) monitoring, Gas fire extinguishing equipment, Insulation impedance detection, Water immersion monitoring (floating ball type),
Compliance	
Standards	Safety: IEC 62619, CNS62619 EMC:IEC/EN 61000-6-2/-4, Other: UN38.3+MSDS, Marine Identification Report

© 2025 Smartgreen-Solution Co., Ltd. All rights reserved. Subject to change with notice. Rev.02 TW 2025.03